

Mach Solid Drill Plus

MSD Plus



Mach Drill Plus Highly Efficient for Hole Making


Highly efficient hole making for various workpieces including automobile components

- **Improved Chip Evacuation**

Excellent chip evacuation thanks to wider chip pockets.


- **Increased Wear Resistance**

Strong wear resistance thanks to our new PC325U grade

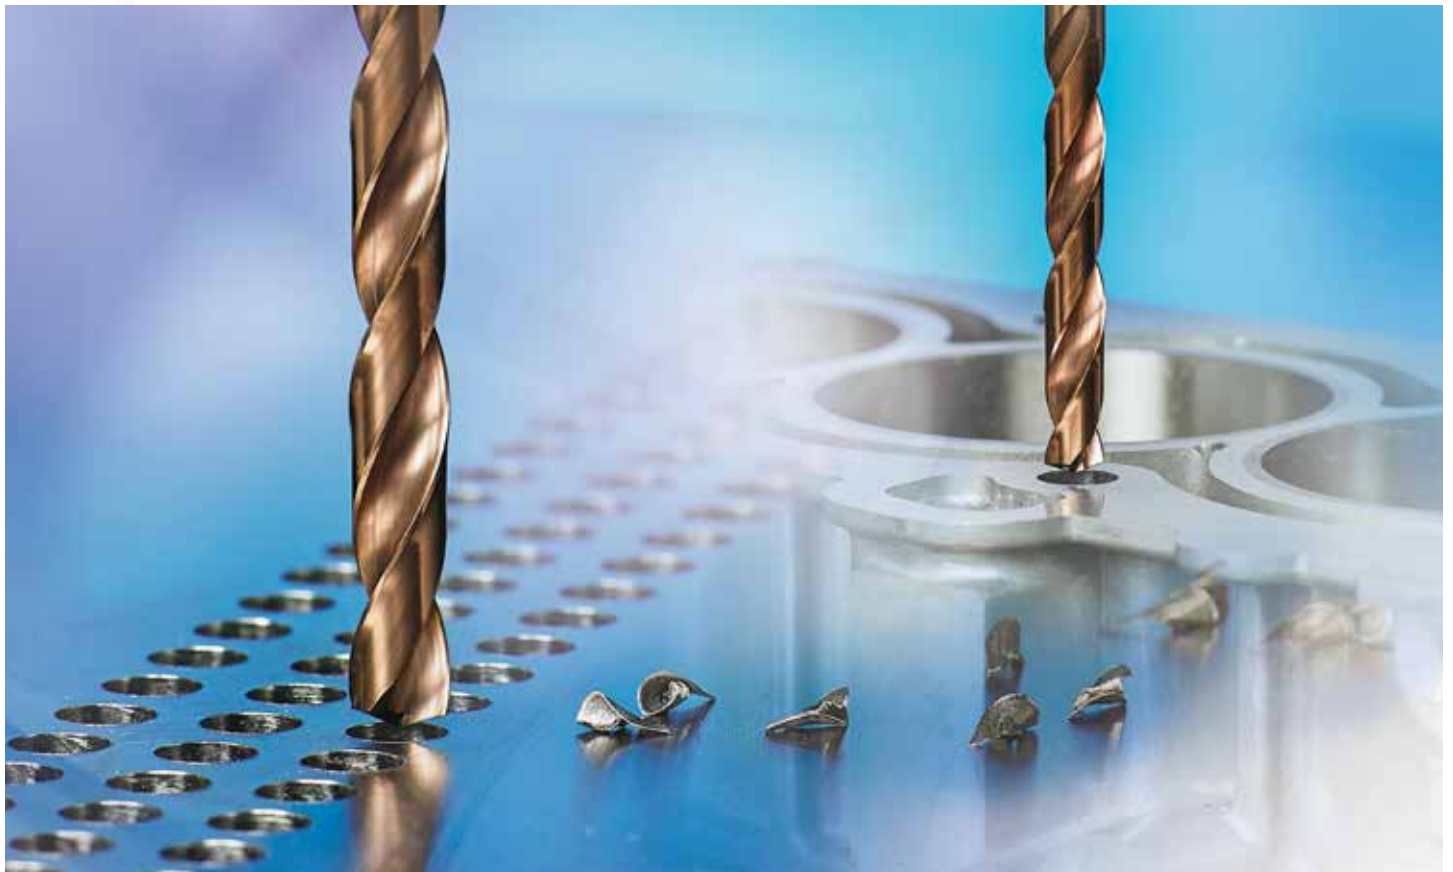

Mach Drill Plus Highly Efficient for Hole Making


MSD Plus



Hole making is a common operation in the cutting tool industry. Those operations are realized under various drilling conditions such as high speed, high feed, dry/wet, etc. At the same time, a wide range of workpieces like carbon steel, cast iron, alloy steel and more are being used. In order to fulfill all the requirements of modern machining, stability and longer tool life are highly valued.

MSD Plus is a solid drill designed for high efficiency and high performance with excellent stability. Chip pockets were widened for better chip evacuation, which led to stable machining and extended tool life.

The new grade **PC325U** was also applied for better surface lubrication and lower cutting load, which also improved wear resistance and welding resistance. This is why MSD Plus has longer tool life and stability when machining a comprehensive range of workpieces at low speed to high speed.

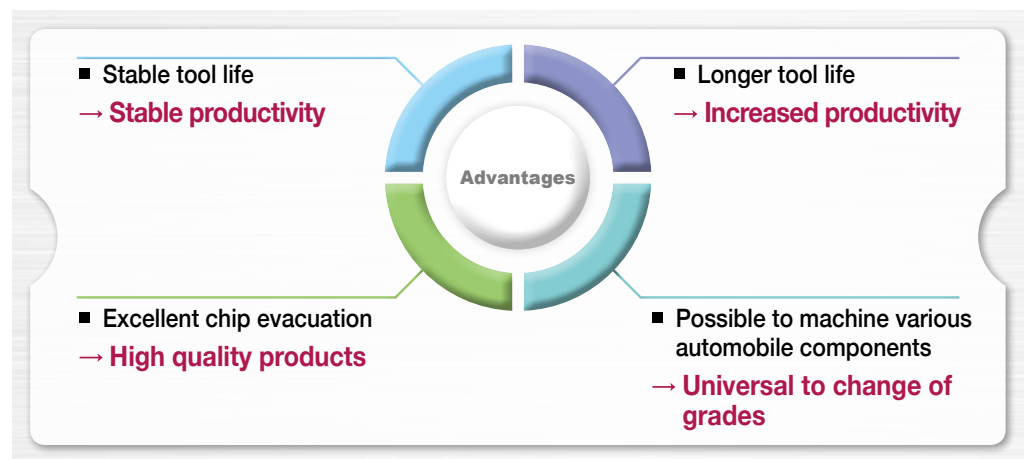

Code System


		Special type			
MSDP(H)	040	5	P	100L	5S
Oil hole	Drill Dia.(ØD)	Standard type		Overall length	Shank Dia.
None : MSDP With oil hole : MSDPH	040 = Ø4.0	Aspect ratio(L/D) 3D, 5D, 7D		100L : 100mm	5S = Ø5
		Special type	Machining area		
		Flute length 100 : 100mm	P : Carbon steel, alloy steel M : Stainless steel K : Cast iron N : Aluminum, copper alloy		

Features

New grade(PC325U)

Increased **welding resistance** and **wear resistance** with new PC325U grade applied.

- Lubricative coating layer improves welding resistance at middle to high speed.
- Increase wear resistance in machining carbon steel

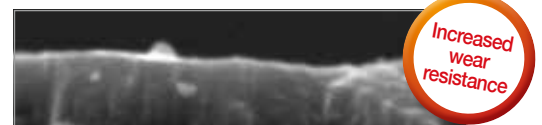


[PC325U]


PC325U has a coating surface more lubricated compared to competitor's rough surface.

Surface of coating layer

- Increased welding resistance and lower cutting load
- Reduced frictional resistance at cutting edges and on the flute



[Competitor]



[PC325U]

Improved lubrication

Good chip shape when machining with MSD Plus compared to competitor's.

Chip control

- Workpiece STS304
- Cutting conditions $vc(m/min) = 90$, $fn(mm/rev) = 0.2$, $ap(mm) = 30$, wet
- Tools MSDP(H)060-5M(PC325U)




[Competitor]



[MSD Plus]


Chips in good shape

Application area

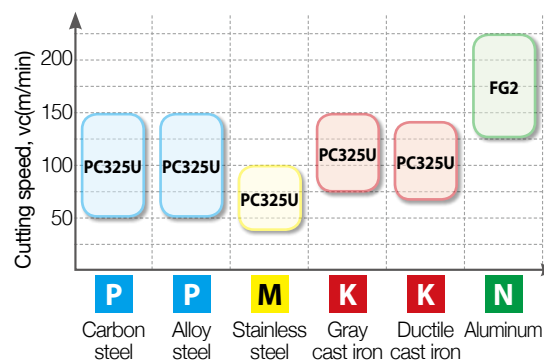

Flute shape


- Improved chip evacuation thanks to wider chip pocket

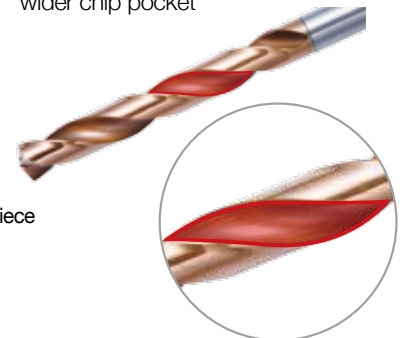


⇒ Cutting Performance

Comparison of wear


- Workpiece SM45C
- Cutting conditions $vc(m/min) = 124$, $fn(mm/rev) = 0.15$, $ap(mm) = 30$, Through coolant
- Tools MSDPH060-5P(PC325U)



[Competitor]



[MSD Plus]



Lubricative coating layer of the new grade PC325U maximizes wear resistance.



Special treatment on coating surface minimized frictional resistance.

Application example

- Workpiece SM53C
- Cutting conditions $vc(m/min) = 60$, $fn(mm/rev) = 0.25$, $ap(mm) = 30$, External coolant
- Tools MSDP120-5P(PC325U)




➤ Recommended Cutting Conditions

Workpiece				Grade	Cutting speed vc(m/min)	Depth of cut = 10D ~ 25D				
ISO	Workpiece materials	Hardness (HB)	Feed rate(mm/rev) per drill dia.(mm)							
			Ø2.5~Ø4.0			Ø4.1~Ø8.0	Ø8.1~Ø12.0	Ø12.1~Ø16.0	Ø16.1~Ø20.0	
P	Carbon steel	Low carbon steel	80~120	PC325U	90(80~150)	0.10~0.15	0.16~0.24	0.20~0.30	0.25~0.36	0.30~0.40
		High carbon steel	250 over	PC325U	50(40~80)	0.08~0.20	0.08~0.20	0.10~0.25	0.15~0.25	0.15~0.30
	Alloy steel	Low alloy steel	140~260	PC325U	90(80~150)	0.10~0.15	0.16~0.24	0.20~0.30	0.25~0.36	0.30~0.40
		Hardened low alloy steel	200~400	PC325U	60(50~100)	0.10~0.15	0.16~0.24	0.20~0.30	0.25~0.36	0.30~0.40
		High alloy steel	50~260	PC325U	50(40~80)	0.08~0.20	0.08~0.20	0.10~0.25	0.15~0.25	0.15~0.30
		Hardened high alloy steel	250 over	PC325U	50(40~80)	0.08~0.20	0.08~0.20	0.10~0.25	0.15~0.25	0.15~0.30
M	Stainless steel	Austenite series	135~275	PC325U	45(25~80)	0.05~0.20	0.05~0.20	0.10~0.25	0.10~0.25	0.15~0.30
		Ferrite series	135~275	PC325U	50(30~80)	0.05~0.20	0.05~0.20	0.10~0.25	0.10~0.25	0.15~0.30
		Martensite series	135~275	PC325U	50(30~80)	0.05~0.20	0.05~0.20	0.10~0.25	0.10~0.25	0.15~0.30
K	Cast iron	Gray cast iron	150~230	PC325U	100(80~150)	0.10~0.15	0.16~0.24	0.20~0.30	0.25~0.36	0.30~0.40
		Ductile cast iron	160~260	PC325U	90(70~140)	0.10~0.15	0.16~0.24	0.20~0.30	0.25~0.36	0.30~0.40
N	Aluminum	Aluminum alloy	30~150	FG2	150(125~220)	0.24~0.38	0.38~0.53	0.53~0.75	0.61~0.85	0.68~0.98
	Copper alloy	Copper alloy	150~160	FG2	150(125~220)	0.10~0.15	0.16~0.24	0.20~0.30	0.25~0.36	0.30~0.40

- Cutting conditions above are for the case of less than 5D depth of cut and through coolant system applied.
- In case of external coolant system, reduce the above feed values by 20%.

➤ MSDP-□ (P/M/K/N)

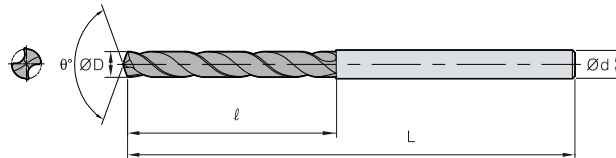


Specification	P	M	K	N
Grade	PC325U	FG2		
Tolerance(drill Dia.)	h7			
Tolerance(shank Dia.)	h6			
Point angle	140°	135°		
Twist angle	30°			
Thinning	X type			
Coolant	External system			
	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metal

(mm)

Designation		ØD	Ød	3P,M,K,N		5P,M,K,N		7P,M,K,N	
				ℓ	L	ℓ	L	ℓ	L
MSDP	010 - □ P,M,K,N	1.0	3.0	6	45	12	66	-	-
	011 - □ P,M,K,N	1.1	3.0	7	45	12	66	-	-
	012 - □ P,M,K,N	1.2	3.0	8	45	12	66	-	-
	013 - □ P,M,K,N	1.3	3.0	8	45	12	66	-	-
	014 - □ P,M,K,N	1.4	3.0	9	45	12	66	-	-
	015 - □ P,M,K,N	1.5	3.0	9	45	12	66	-	-
	016 - □ P,M,K,N	1.6	3.0	10	45	15	66	-	-
	017 - □ P,M,K,N	1.7	3.0	10	45	15	66	-	-
	018 - □ P,M,K,N	1.8	3.0	11	45	15	66	-	-
	019 - □ P,M,K,N	1.9	3.0	11	45	15	66	-	-
	020 - □ P,M,K,N	2.0	3.0	14	53	20	66	-	-
	021 - □ P,M,K,N	2.1	3.0	14	53	20	66	-	-
	022 - □ P,M,K,N	2.2	3.0	14	53	20	66	-	-
	023 - □ P,M,K,N	2.3	3.0	14	53	20	66	-	-
	024 - □ P,M,K,N	2.4	3.0	14	53	20	66	-	-

※ Pre-orders can be made in advance for non-stock items.

MSDP(H)-□ (P/M/K/N)

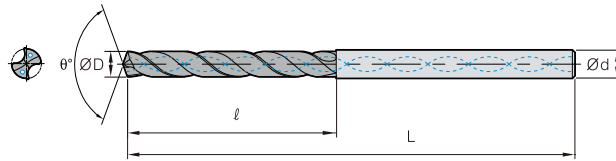


Specification	P	M	K	N
Grade	PC325U			FG2
Tolerance(drill Dia.)	h7			
Tolerance(shank Dia.)	h6			
Point angle	140°		135°	
Twist angle	30°			
Thinning	X type			
Coolant	Through / External system			
P Steel	M Stainless steel		K Cast iron	
	N Non-ferrous metal			

(mm)

Designation		ØD	Ød	3P,M,K,N		5P,M,K,N		7P,M,K,N	
				ℓ	L	ℓ	L	ℓ	L
MSDP(H)	025 - □ P,M,K,N	2.5	3.0	14	53	20	66	30	70
	026 - □ P,M,K,N	2.6	3.0	17	53	20	66	30	70
	027 - □ P,M,K,N	2.7	3.0	17	53	20	66	30	70
	028 - □ P,M,K,N	2.8	3.0	17	53	20	66	30	70
	029 - □ P,M,K,N	2.9	3.0	17	53	20	66	30	70
	030 - □ P,M,K,N	3.0	3.0	17	53	20	66	30	70
	031 - □ P,M,K,N	3.1	4.0	20	58	28	74	30	70
	032 - □ P,M,K,N	3.2	4.0	20	58	28	74	30	70
	033 - □ P,M,K,N	3.3	4.0	20	58	28	74	30	70
	034 - □ P,M,K,N	3.4	4.0	20	58	28	74	37.5	75
	035 - □ P,M,K,N	3.5	4.0	20	58	28	74	37.5	75
	036 - □ P,M,K,N	3.6	4.0	22	58	32	74	37.5	75
	037 - □ P,M,K,N	3.7	4.0	22	58	32	74	37.5	75
	038 - □ P,M,K,N	3.8	4.0	22	58	32	74	37.5	75
	039 - □ P,M,K,N	3.9	4.0	22	58	32	74	37.5	75
	040 - □ P,M,K,N	4.0	4.0	22	58	32	74	37.5	75
	041 - □ P,M,K,N	4.1	4.0	24	62	36	82	37.5	75
	042 - □ P,M,K,N	4.2	4.0	24	62	36	82	37.5	75
	043 - □ P,M,K,N	4.3	4.0	24	62	36	82	45	85
	044 - □ P,M,K,N	4.4	4.0	24	62	36	82	45	85
	045 - □ P,M,K,N	4.5	4.0	24	62	36	82	45	85
	046 - □ P,M,K,N	4.6	4.0	26	62	38	82	45	85
	047 - □ P,M,K,N	4.7	4.0	26	62	38	82	45	85
	048 - □ P,M,K,N	4.8	4.0	26	62	38	82	50	90
	049 - □ P,M,K,N	4.9	4.0	26	62	38	82	50	90
	050 - □ P,M,K,N	5.0	5.0	26	62	38	82	50	90
	051 - □ P,M,K,N	5.1	6.0	28	66	44	82	50	90
	052 - □ P,M,K,N	5.2	6.0	28	66	44	82	50	90
	053 - □ P,M,K,N	5.3	6.0	28	66	44	82	50	90
	054 - □ P,M,K,N	5.4	6.0	28	66	44	82	50	90
	055 - □ P,M,K,N	5.5	6.0	28	66	44	82	57	97
	056 - □ P,M,K,N	5.6	6.0	28	66	44	82	57	97
	057 - □ P,M,K,N	5.7	6.0	28	66	44	82	57	97
	058 - □ P,M,K,N	5.8	6.0	28	66	44	82	57	97
	059 - □ P,M,K,N	5.9	6.0	28	66	44	82	57	97
	060 - □ P,M,K,N	6.0	6.0	28	66	44	82	57	97
	061 - □ P,M,K,N	6.1	7.0	34	74	50	91	66	106
	062 - □ P,M,K,N	6.2	7.0	34	74	50	91	66	106
	063 - □ P,M,K,N	6.3	7.0	34	74	50	91	66	106
	064 - □ P,M,K,N	6.4	7.0	34	74	50	91	66	106
	065 - □ P,M,K,N	6.5	7.0	34	74	50	91	66	106
	066 - □ P,M,K,N	6.6	7.0	34	74	50	91	66	106
	067 - □ P,M,K,N	6.7	7.0	34	74	50	91	66	106
	068 - □ P,M,K,N	6.8	7.0	34	74	50	91	66	106
	069 - □ P,M,K,N	6.9	7.0	34	74	50	91	76	116
	070 - □ P,M,K,N	7.0	7.0	34	74	50	91	76	116
	071 - □ P,M,K,N	7.1	8.0	41	79	53	91	76	116
	072 - □ P,M,K,N	7.2	8.0	41	79	53	91	76	116

MSD Plus

MSDP(H)-□ (P/M/K/N)

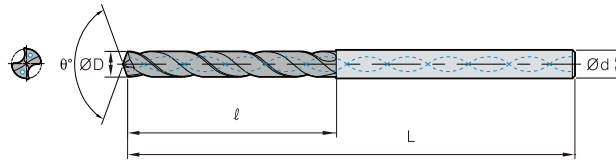


Specification	P	M	K	N
Grade	PC325U			FG2
Tolerance(drill Dia.)	h7			
Tolerance(shank Dia.)	h6			
Point angle	140°			135°
Twist angle	30°			
Thinning	X type			
Coolant	Through / External system			
P Steel	M Stainless steel			
K Cast iron	N Non-ferrous metal			

(mm)

Designation		ØD	Ød	3P,M,K,N		5P,M,K,N		7P,M,K,N	
				ℓ	L	ℓ	L	ℓ	L
MSDP(H)	073 - □ P,M,K,N	7.3	8.0	41	79	53	91	76	116
	074 - □ P,M,K,N	7.4	8.0	41	79	53	91	76	116
	075 - □ P,M,K,N	7.5	8.0	41	79	53	91	76	116
	076 - □ P,M,K,N	7.6	8.0	41	79	53	91	76	116
	077 - □ P,M,K,N	7.7	8.0	41	79	53	91	76	116
	078 - □ P,M,K,N	7.8	8.0	41	79	53	91	76	116
	079 - □ P,M,K,N	7.9	8.0	41	79	53	91	76	116
	080 - □ P,M,K,N	8.0	8.0	43	84	58	98	87	131
	081 - □ P,M,K,N	8.1	9.0	43	84	58	98	87	131
	082 - □ P,M,K,N	8.2	9.0	43	84	58	98	87	131
	083 - □ P,M,K,N	8.3	9.0	43	84	58	98	87	131
	084 - □ P,M,K,N	8.4	9.0	43	84	58	98	87	131
	085 - □ P,M,K,N	8.5	9.0	43	84	58	98	87	131
	086 - □ P,M,K,N	8.6	9.0	43	84	58	98	87	131
	087 - □ P,M,K,N	8.7	9.0	43	84	58	98	87	131
	088 - □ P,M,K,N	8.8	9.0	43	84	58	98	87	131
	089 - □ P,M,K,N	8.9	9.0	43	84	58	98	87	131
	090 - □ P,M,K,N	9.0	9.0	43	84	58	98	87	131
	091 - □ P,M,K,N	9.1	10.0	47	89	61	105	95	139
	092 - □ P,M,K,N	9.2	10.0	47	89	61	105	95	139
	093 - □ P,M,K,N	9.3	10.0	47	89	61	105	95	139
	094 - □ P,M,K,N	9.4	10.0	47	89	61	105	95	139
	095 - □ P,M,K,N	9.5	10.0	47	89	61	105	95	139
	096 - □ P,M,K,N	9.6	10.0	47	89	61	105	95	139
	097 - □ P,M,K,N	9.7	10.0	47	89	61	105	95	139
	098 - □ P,M,K,N	9.8	10.0	47	89	61	105	95	139
	099 - □ P,M,K,N	9.9	10.0	47	89	61	105	95	139
	100 - □ P,M,K,N	10.0	10.0	47	89	61	105	95	139
	101 - □ P,M,K,N	10.1	11.0	55	95	68	114	106	155
	102 - □ P,M,K,N	10.2	11.0	55	95	68	114	106	155
	103 - □ P,M,K,N	10.3	11.0	55	95	68	114	106	155
	104 - □ P,M,K,N	10.4	11.0	55	95	68	114	106	155
	105 - □ P,M,K,N	10.5	11.0	55	95	68	114	106	155
	106 - □ P,M,K,N	10.6	11.0	55	95	68	114	106	155
	107 - □ P,M,K,N	10.7	11.0	55	95	68	114	106	155
	108 - □ P,M,K,N	10.8	11.0	55	95	68	114	106	155
	109 - □ P,M,K,N	10.9	11.0	55	95	68	114	106	155
	110 - □ P,M,K,N	11.0	11.0	55	95	68	114	106	155
	111 - □ P,M,K,N	11.1	12.0	55	102	71	120	114	163
	112 - □ P,M,K,N	11.2	12.0	55	102	71	120	114	163
	113 - □ P,M,K,N	11.3	12.0	55	102	71	120	114	163
	114 - □ P,M,K,N	11.4	12.0	55	102	71	120	114	163
	115 - □ P,M,K,N	11.5	12.0	55	102	71	120	114	163
	116 - □ P,M,K,N	11.6	12.0	55	102	71	120	114	163
	117 - □ P,M,K,N	11.7	12.0	55	102	71	120	114	163
	118 - □ P,M,K,N	11.8	12.0	55	102	71	120	114	163
	119 - □ P,M,K,N	11.9	12.0	55	102	71	120	114	163
	120 - □ P,M,K,N	12.0	12.0	55	102	71	120	114	163

MSDP(H)-□ (P/M/K/N)

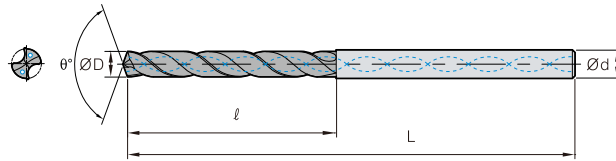


Specification	P	M	K	N
Grade	PC325U			FG2
Tolerance(drill Dia.)	h7			
Tolerance(shank Dia.)	h6			
Point angle	140°			135°
Twist angle	30°			
Thinning	X type			
Coolant	Through / External system			
	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metal

(mm)

Designation		ØD	Ød	3P,M,K,N		5P,M,K,N		7P,M,K,N	
				ℓ	L	ℓ	L	ℓ	L
MSDP(H)	121 - □ P,M,K,N	12.1	13.0	60	107	77	124	133	182
	122 - □ P,M,K,N	12.2	13.0	60	107	77	124	133	182
	123 - □ P,M,K,N	12.3	13.0	60	107	77	124	133	182
	124 - □ P,M,K,N	12.4	13.0	60	107	77	124	133	182
	125 - □ P,M,K,N	12.5	13.0	60	107	77	124	133	182
	126 - □ P,M,K,N	12.6	13.0	60	107	77	124	133	182
	127 - □ P,M,K,N	12.7	13.0	60	107	77	124	133	182
	128 - □ P,M,K,N	12.8	13.0	60	107	77	124	133	182
	129 - □ P,M,K,N	12.9	13.0	60	107	77	124	133	182
	130 - □ P,M,K,N	13.0	13.0	60	107	77	124	133	182
	131 - □ P,M,K,N	13.1	14.0	62	107	80	133	133	182
	132 - □ P,M,K,N	13.2	14.0	62	107	80	133	133	182
	133 - □ P,M,K,N	13.3	14.0	62	107	80	133	133	182
	134 - □ P,M,K,N	13.4	14.0	62	107	80	133	133	182
	135 - □ P,M,K,N	13.5	14.0	62	107	80	133	133	182
	136 - □ P,M,K,N	13.6	14.0	62	107	80	133	133	182
	137 - □ P,M,K,N	13.7	14.0	62	107	80	133	133	182
	138 - □ P,M,K,N	13.8	14.0	62	107	80	133	133	182
	139 - □ P,M,K,N	13.9	14.0	62	107	80	133	133	182
	140 - □ P,M,K,N	14.0	14.0	62	107	80	133	133	182
	141 - □ P,M,K,N	14.1	15.0	65	115	85	143	152	204
	142 - □ P,M,K,N	14.2	15.0	65	115	85	143	152	204
	143 - □ P,M,K,N	14.3	15.0	65	115	85	143	152	204
	144 - □ P,M,K,N	14.4	15.0	65	115	85	143	152	204
	145 - □ P,M,K,N	14.5	15.0	65	115	85	143	152	204
	146 - □ P,M,K,N	14.6	15.0	65	115	85	143	152	204
	147 - □ P,M,K,N	14.7	15.0	65	115	85	143	152	204
	148 - □ P,M,K,N	14.8	15.0	65	115	85	143	152	204
	149 - □ P,M,K,N	14.9	15.0	65	115	85	143	152	204
	150 - □ P,M,K,N	15.0	15.0	65	115	85	143	152	204
	151 - □ P,M,K,N	15.1	16.0	68	115	88	143	152	204
	152 - □ P,M,K,N	15.2	16.0	68	115	88	143	152	204
	153 - □ P,M,K,N	15.3	16.0	68	115	88	143	152	204
	154 - □ P,M,K,N	15.4	16.0	68	115	88	143	152	204
	155 - □ P,M,K,N	15.5	16.0	68	115	88	143	152	204
	156 - □ P,M,K,N	15.6	16.0	68	115	88	143	152	204
	157 - □ P,M,K,N	15.7	16.0	68	115	88	143	152	204
	158 - □ P,M,K,N	15.8	16.0	68	115	88	143	152	204
	159 - □ P,M,K,N	15.9	16.0	68	115	88	143	152	204
	160 - □ P,M,K,N	16.0	16.0	68	115	88	143	152	204
	161 - □ P,M,K,N	16.1	17.0	73	123	93	153	171	223
	162 - □ P,M,K,N	16.2	17.0	73	123	93	153	171	223
	163 - □ P,M,K,N	16.3	17.0	73	123	93	153	171	223
	164 - □ P,M,K,N	16.4	17.0	73	123	93	153	171	223
	165 - □ P,M,K,N	16.5	17.0	73	123	93	153	171	223
	166 - □ P,M,K,N	16.6	17.0	73	123	93	153	171	223
	167 - □ P,M,K,N	16.7	17.0	73	123	93	153	171	223
	168 - □ P,M,K,N	16.8	17.0	73	123	93	153	171	223

MSD Plus

MSDP(H)-□ (P/M/K/N)

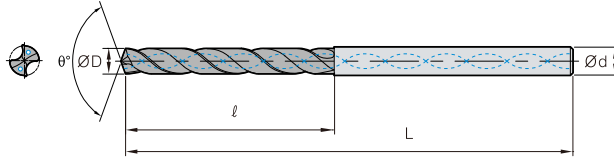

Specification	P	M	K	N
Grade	PC325U			FG2
Tolerance(drill Dia.)	h7			
Tolerance(shank Dia.)	h6			
Point angle	140°			135°
Twist angle	30°			
Thinning	X type			
Coolant	Through / External system			
	P Steel	M Stainless steel	K Cast iron	N Non-ferrous metal

(mm)

Designation		ØD	Ød	3P,M,K,N		5P,M,K,N		7P,M,K,N	
				ℓ	L	ℓ	L	ℓ	L
MSDP(H)	169 - □ P,M,K,N	16.9	17.0	73	123	93	153	171	223
	170 - □ P,M,K,N	17.0	17.0	73	123	93	153	171	223
	171 - □ P,M,K,N	17.1	18.0	73	123	98	153	171	223
	172 - □ P,M,K,N	17.2	18.0	73	123	98	153	171	223
	173 - □ P,M,K,N	17.3	18.0	73	123	98	153	171	223
	174 - □ P,M,K,N	17.4	18.0	73	123	98	153	171	223
	175 - □ P,M,K,N	17.5	18.0	73	123	98	153	171	223
	176 - □ P,M,K,N	17.6	18.0	73	123	98	153	171	223
	177 - □ P,M,K,N	17.7	18.0	73	123	98	153	171	223
	178 - □ P,M,K,N	17.8	18.0	73	123	98	153	171	223
	179 - □ P,M,K,N	17.9	18.0	73	123	98	153	171	223
	180 - □ P,M,K,N	18.0	18.0	73	123	98	153	171	223
	181 - □ P,M,K,N	18.1	19.0	79	131	103	153	190	244
	182 - □ P,M,K,N	18.2	19.0	79	131	103	153	190	244
	183 - □ P,M,K,N	18.3	19.0	79	131	103	153	190	244
	184 - □ P,M,K,N	18.4	19.0	79	131	103	153	190	244
	185 - □ P,M,K,N	18.5	19.0	79	131	103	153	190	244
	186 - □ P,M,K,N	18.6	19.0	79	131	103	153	190	244
	187 - □ P,M,K,N	18.7	19.0	79	131	103	153	190	244
	188 - □ P,M,K,N	18.8	19.0	79	131	103	153	190	244
	189 - □ P,M,K,N	18.9	19.0	79	131	103	153	190	244
	190 - □ P,M,K,N	19.0	19.0	79	131	103	153	190	244
	191 - □ P,M,K,N	19.1	20.0	79	131	107	153	190	244
	192 - □ P,M,K,N	19.2	20.0	79	131	107	153	190	244
	193 - □ P,M,K,N	19.3	20.0	79	131	107	153	190	244
	194 - □ P,M,K,N	19.4	20.0	79	131	107	153	190	244
	195 - □ P,M,K,N	19.5	20.0	79	131	107	153	190	244
	196 - □ P,M,K,N	19.6	20.0	79	131	107	153	190	244
	197 - □ P,M,K,N	19.7	20.0	79	131	107	153	190	244
	198 - □ P,M,K,N	19.8	20.0	79	131	107	153	190	244
	199 - □ P,M,K,N	19.9	20.0	79	131	107	153	190	244
	200 - □ P,M,K,N	20.0	20.0	79	131	107	153	190	244



Holystar B/D, 1350, Nambusunhwan-ro, Geumcheon-gu, Seoul, 08536, Korea

Tel : +82-2-522-3181 Fax : +82-2-522-3184, +82-2-3474-4744 Web : www.korloy.com E-mail : export@korloy.com



620 Maple Avenue, Torrance, CA 90503, USA

Tel : +1-310-782-3800 Toll Free : +1-888-711-0001 Fax : +1-310-782-3885

www.korloyamerica.com E-mail : sales@korloy.us



Gablonzer Str. 25-27, 61440 Oberursel, Germany

Tel : +49-6171-277-83-0 Fax : +49-6171-277-83-59

www.korloyeurope.com E-mail : sales@korloyeurope.com



Plot NO.415, Sector 8, IMT Manesar, Gurgaon 122051, Haryana, INDIA

Tel : +91-124-4391790 Fax : +91-124-4050032

www.korloyindia.com E-mail : sales.kip@korloy.com



Av. Aruana 280, conj.12, WLC, Alphaville, Barueri,

CEP06460-010, SP, Brasil

Tel : +55-11-4193-3810 E-mail : vendas@korloy.com

20160410
TN04-EM-01